

4-Post-parking lift - GREY-Line

Item No.: TW436P-G

3600 kg
 1,90 m
 230 V
 Semi-auto.

Description

The practical 4 post parking lift.

With its optional mobile kit you can use this lift in very tight spaces and with the optional offset motor brackets you can assemble more lifts along side of each other.

Features

- 1A Quality built with CE-Certificate
- Manufactured in accordance to ISO 9001
- Hydraulic overflow valve
- A hydraulic cylinder underneath the runway provides powerful lifting and lowering capabilities
- Mechanical safety lock
- Manual safety-lock-release
- Cable break safety device
- Roll on-off protection
- Foot protection
- Acoustic warning signal
- Wide drive on ramps
- Easy to use control unit (Safety rate to IP 54)

Delivery contents

- Lift incl. Power unit
- Examination book and CE-Certificate
- Wheel chocks included (2 pcs.)
- **Assembly video online**
- **Product video online**



Included

Wheel chocks
(2 pcs.)



Videos



Product video




Assembly video



Dimensions

Maximum vehicle wheel base (under the lift): 2040 mm
 Maximum width between posts: 2380 mm
 Maximum width on the lift: 2280 mm
 Secured clearance: ca. 1730 mm

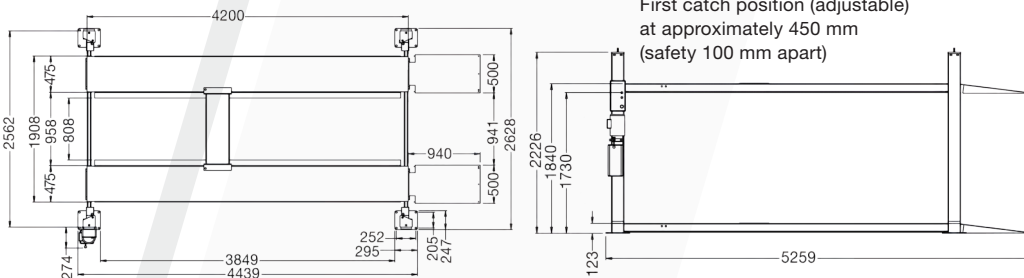


Further information to be found at www.twinbusch.co.uk

Technical Data

Lifting capacity	3600 kg
Lifting height max.	1900 mm
Runway (L./W.)	4094/475 mm
Lifting, lowering time (approx.)	45/30 sec.
Power supply	230 V
Motor power	2,2 kW
Fusing	16 A / type C
Weight (approx.)	830 kg

Optional accessory

Mobile kit | Item No.: TW436P-RK



Offset plates
Item No.: TW436P-VP



Jacking beam
Item No.: TW436PW-G



LED lighting (LED-KIT)
Item No.: TWLED-4P



Fitted shelves (8 units) | Item No.: TW436P-EB



Oil drip tray
Item No.: TW436P-ÖLW



Further accessories can be found at www.twinbusch.co.uk